

CHARACTER:

1.Physical performance

- a、Excellent thermal stability
- b、Good mechanical properties
- c、Long-term ageing resistance
- d、high resistance to chemicals
- e、Good flame retardancy (VW-1)
- f、Suitable for water, fuel, oil, acid and alkali environment

2.Electrical Properties

- a、Electrical insulation good
- b、Good the dielectric properties

3.Processing properties

- a、Using the Half extrusion processing
- b、Can be twisted pair and multi-core
- c、According to UL standard design

4.Environmental protection

- a、ROHS/REACH compliant
- b、Low smoke


SHOULD BE USED:

Internal wiring of appliances and electronic equipment.

REFERENCE:

UL758-2010、UL1581-2009

Outline:

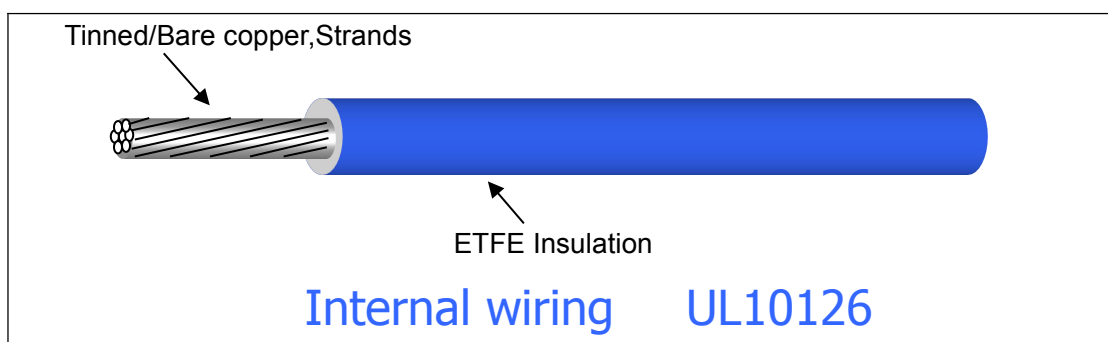

Wire structure description:
 Conductor: Tinned/Bare copper, Strands
 Insulation materials: ETFE Insulation

Conductor temperature not over 150°C ETFE insulated wire
 Rated temperature: 150°C rated voltage: 600V

STYLE	standard AWG	Conductor size (No./ mm) ±0.005mm	Conductor resistance 20°C (Ω/Km)	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)	
					Nom.	Min.	Mon	Tol
10126	10	37/0.42	3.54	2.94	0.40	0.33	3.75	±0.15
	12	37/0.374	5.64	2.62	0.40	0.33	3.42	±0.15
	14	19/0.361	8.96	1.85	0.25	0.23	2.35	±0.10
	16	19/0.287	14.60	1.50	0.25	0.23	2.00	±0.10
	18	19/0.235	23.20	1.18	0.25	0.23	1.70	±0.10
	20	19/0.19	36.70	0.95	0.25	0.23	1.45	±0.10
	22	19/0.15	59.40	0.76	0.25	0.23	1.26	±0.10
	24	7/0.20	94.20	0.60	0.25	0.23	1.10	±0.10
	26	7/0.16	150.00	0.48	0.25	0.23	1.00	±0.10
	28	7/0.127	239.00	0.38	0.25	0.23	0.90	±0.10
	30	1/0.254	361.00	0.254	0.25	0.23	0.75	±0.10

Marking: E211048 AWM STYLE 10126 NO.AWG 150°C 600V VW-1 ETFE QIFURUI-LF-

SAE COLOR SERIES

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

PACKAGE

*PACKAGE			
Part No.	Packing- FT/roll		
10AWG	<input checked="" type="checkbox"/> 500Ft	<input type="checkbox"/> 1000Ft	<input type="checkbox"/> 2000Ft
12~20AWG	<input type="checkbox"/> 500Ft	<input checked="" type="checkbox"/> 1000Ft	<input type="checkbox"/> 2000Ft
22-30AWG	<input type="checkbox"/> 500Ft	<input type="checkbox"/> 1000Ft	<input checked="" type="checkbox"/> 2000Ft

According to customer requirements for packaging packaging

